



## GENERAL FEATURES

- Rack size **38x38 cm**
- Gross weight: 39 Kg
- Washing cycle / racks/hour : 120" / 30
- Bottom wash/rinse arm
- Top rinse arm
- Wash pump 200 W
- Boiler capacity 3 liters
- Tank capacity 10 liters
- Boiler heating element 2,8 kW
- Tank heating element 2,4 kW
- Water quantity per cycle 2 liters
- Electomechanical controls
- Extractable control panel
- Useful washing height: 250 mm
- Magnetic door microswitch
- Automatic water filling
- Built-in rinse-aid dispenser (adjustable)
- Hot rinse
- Thermostop function
- Anti back-flow valve

## FILTRATION

- Plastic wash pump filter, easily removable

## BODY

- AISI 304 stainless steel Body
- Single skinned body
- Preformed wash tank
- Double skinned door
- Door handle in s/s
- Wash/rinse arms in s/s, easily removable
- Boiler in s/s AISI 304
- PVC protection rear the bottom front panel

## EQUIPMENT AS GLASSWASHER

- 2 glass racks 38x38 cm
- 1 cutlery small basket
- 1 insert for saucers
- 1 inlet hose (length 2 m)
- 1 drain hose (length 2,5 m)

## OPTIONAL

- Electric detergent dispenser
- Electric rinse-aid dispenser
- Drain pump
- Kit external rinse booster pump
- Cold rinse
- 60 Hz version

## ACCESSORIES FOR THE WATER TREATMENT

- Internal water softener ("S" version)

## ACCESSORIES

- Special racks (Round, diam. cm. 38)

## INSTALLATION

- Use the screws of the feet and a spirit level to ensure that the machine is levelled

## MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multipole wall switch provided



## WATER SUPPLY CONNECTION






- A water softener must be installed if the water is hard
- The water pressure must be between 0.2MPa (2 bar), and, 0.5MPa (5 bar)
- The temperature of the water-supply must be between 10°C to 50°C

## TECHNICAL SPECIFICATIONS

- Voltage: **220-240 V ~ 50 Hz**
- Total power: **3,0 kW**
- Amperage: **14 A**
- Power cord supply size: **3 x 1,5 mmq**
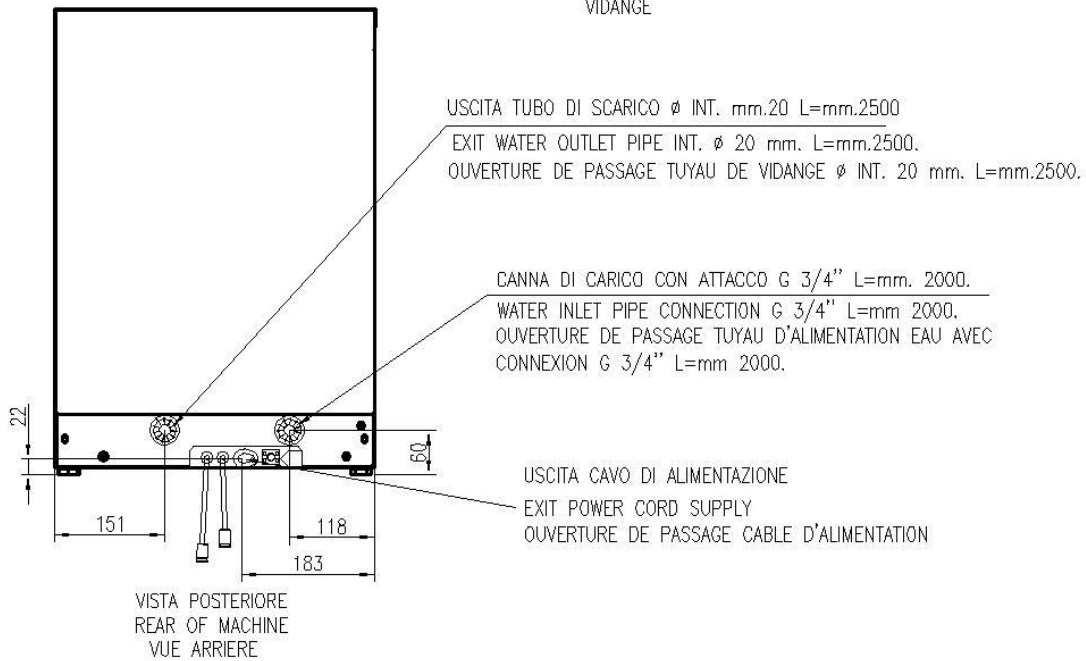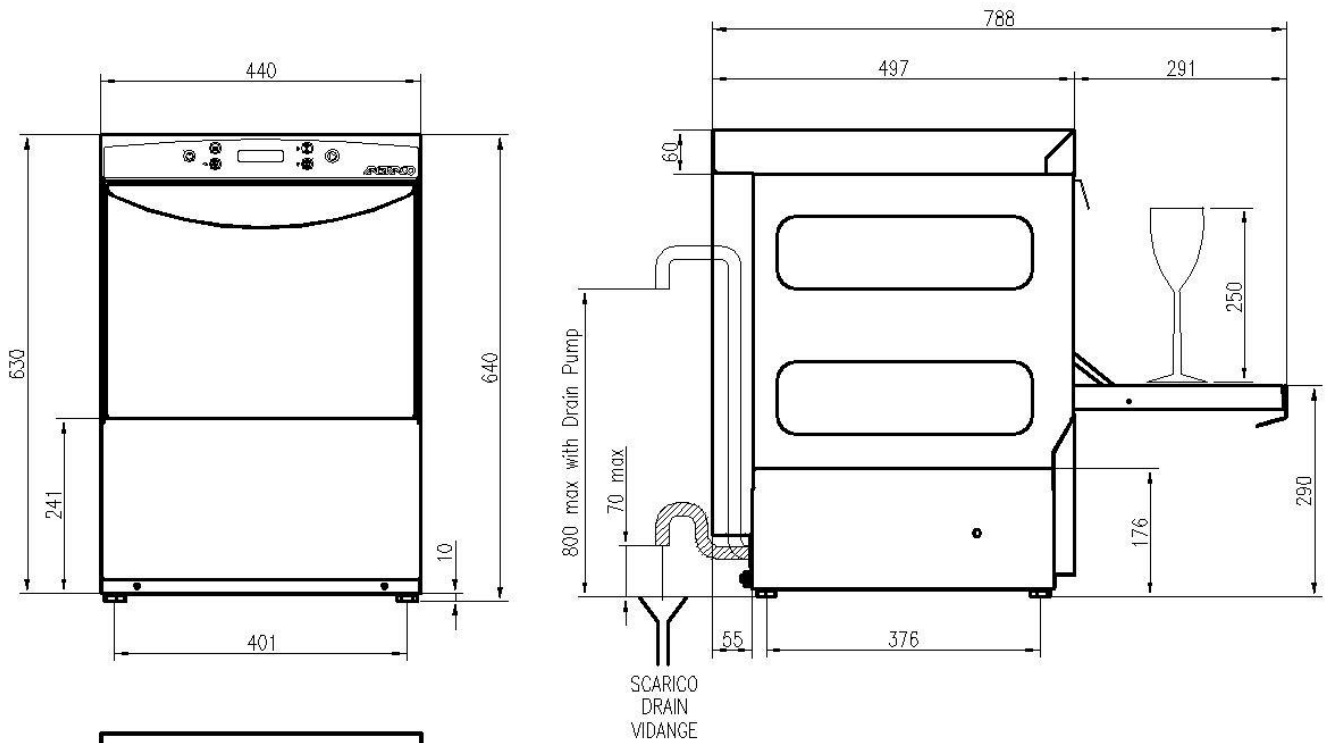
## AF 38.25



	Min 10°C-MAX 50°C
	Min 10°C-MAX 25°C with ENERGY RECOVERY
	200÷500kPa(2÷5 Bar)
	100÷500kPa(1÷5 Bar) with ATMOSPHERIC BOILER
	HARDNESS 5÷20°f-2.8÷11°d