



GENERAL FEATURES

- Rack size **45x45 cm**
- Gross weight: 55 Kg
- Washing cycle / racks/hour : 120" / 30
- Bottom and top wash/rinse arm
- Wash pump 550 W
- Boiler capacity 5 liters
- Tank capacity 18 liters
- Boiler heating element 2,8 kW (4,5 kW Ver.400V3N)
- Tank heating element 2,4 kW
- Water quantity per cycle: 2 liters
- Electromechanical controls
- Extractable control panel
- Useful washing height:300 mm
- Magnetic door micro switch
- Automatic water filling
- Built-in rinse aid dispenser (adjustable)
- Hot rinse
- Thermostop function
- Anti back-flow valve

FILTRATION

- Plastic wash pump filter, easily removable

BODY

- AISI 304 stainless steel Body
- Partial double skinned body
- Preformed rack guides
- Preformed wash tank
- Double skinned door
- Door handle in s/s
- Wash/rinse arms in s/s, easily removable
- Boiler in s/s AISI 304

EQUIPMENT

- 1 glass rack 45x45 cm
- 1 plates rack 45x45 cm. 14 plates
- 1 cutlery small basket
- 1 inlet hose (length 2 m)
- 1 drain hose (length 2,5 m)

OPTIONAL

- Electric detergent dispenser
- Electric rinse-aid dispenser
- Drain pump
- Rinse booster pump
- Cold rinse
- Kit s/s tank filters for pre-filtering of tank water
- 400V3N~50Hz version
- 60 Hz version

ACCESSORIES FOR THE WATER TREATMENT

- Internal water softener ("S" version)

ACCESSORIES

- Special racks

INSTALLATION

- Use the screws of the feet and a spirit level to ensure that the machine is levelled

MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multipole wall switch provided



WATER SUPPLY CONNECTION

- A water softener must be installed if the water is hard
- The water pressure must be between 0.2MPa (2 bar), and, 0.5MPa (5 bar)
- The temperature of the water-supply must be between 10°C to 50°C

TECHNICAL SPECIFICATIONS

- Voltage: **230 V ~ 50 Hz /400 V3N~ 50 Hz**
- Total power: **3,35 kW / 5,05 kW**
- Amperage: **15 A / 8 A**
- Power cord supply size:**3x1,5 mmq/5x1,5 mmq**

AF 45.30

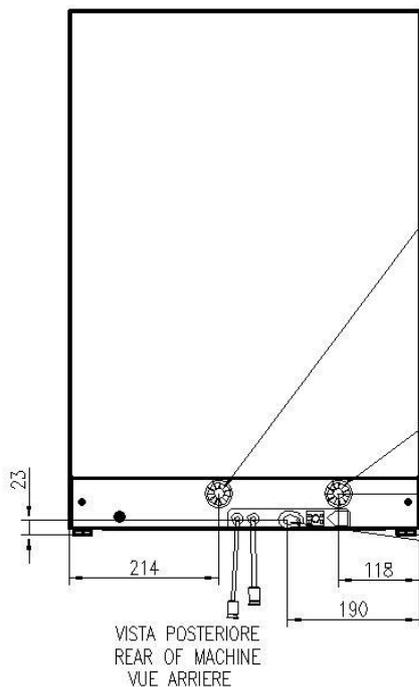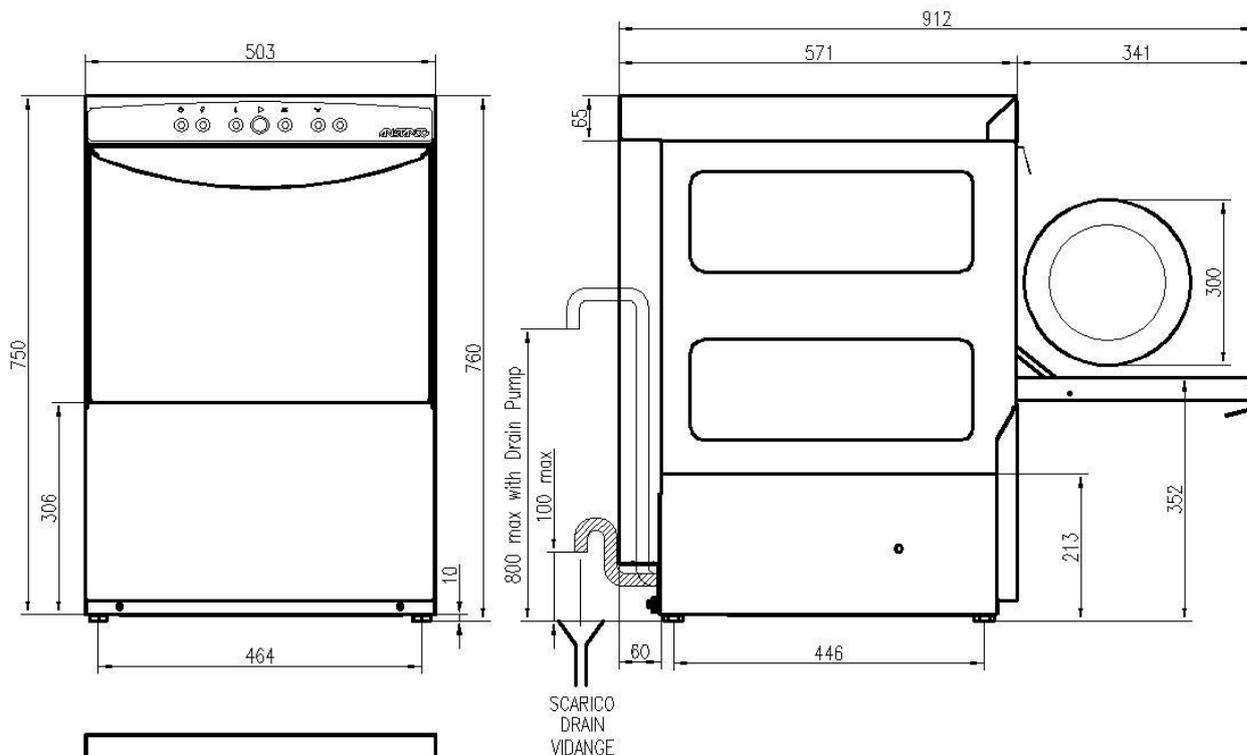

USCITA TUBO DI SCARICO Ø INT. mm.20 L=mm.2500
 EXIT WATER OUTLET PIPE INT. Ø 20 mm. L=mm.2500.
 OUVERTURE DE PASSAGE TUYAU DE VIDANGE Ø INT. 20 mm. L=mm.2500.

CANNA DI CARICO CON ATTACCO G 3/4" L=mm. 2000.
 WATER INLET PIPE CONNECTION G 3/4" L=mm 2000.
 OUVERTURE DE PASSAGE TUYAU D'ALIMENTATION EAU AVEC
 CONNEXION G 3/4" L=mm 2000.

USCITA CAVO DI ALIMENTAZIONE
 EXIT POWER CORD SUPPLY
 OUVERTURE DE PASSAGE CABLE D'ALIMENTATION

| | |
|--|---|
| | Min 10°C-MAX 50°C |
| | Min 10°C-MAX 25°C with ENERGY RECOVERY |
| | 200÷500kPa(2÷5 Bar) |
| | 100÷500kPa(1÷5 Bar) with ATMOSPHERIC BOILER |
| | HARDNESS 5÷20°f-2.8÷11°d |